


T5

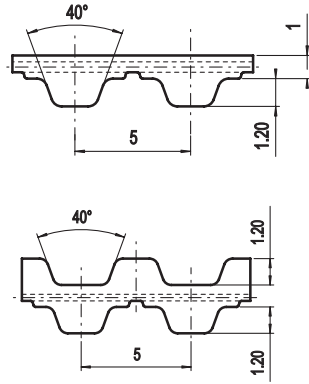


Belt characteristics

- Polyurethane timing belt with steel tension cords
 - Trapezoidal tooth profile according to DIN 7721 T1
 - Metric pitch 5 mm
 - Ideal for drives where high belt flexibility is requested
 - Widely used for conveying, linear drive and light power transmission applications
 - Double sided tooth construction available
- Width tolerance: $\pm 0,5$ [mm]
 - Length tolerance: $\pm 0,5$ [mm/m]
 - Thickness tolerance: $\pm 0,2$ [mm]

Technical data

Belt width b [mm]	Allowable tensile load Type M F_{Tzul} [N]	Allowable tensile load Type V F_{Tzul} [N]	Breaking load Type M F_{Br} [N]	Specific spring rate C_{spez} [N]	Weight [kg/m]
10	320	160	1250	80000	0,021
16	540	270	2125	135000	0,034
25	900	450	3500	225000	0,053
32	1150	575	4500	287500	0,067
50	1860	930	7250	465000	0,105
75	2820	1410	11000	705000	0,158
100	3780	1890	14750	945000	0,210

Load / Elongation [%]

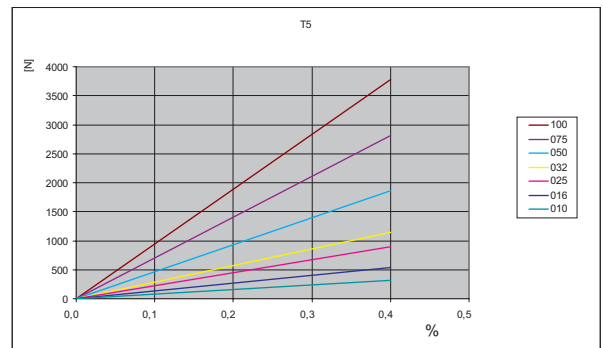


Other widths are available on request.

Tooth shear strength

rpm	F_{Uspez} [N/cm]	rpm	F_{Uspez} [N/cm]	rpm	F_{Uspez} [N/cm]	rpm	F_{Uspez} [N/cm]
0	24,70	800	17,02	1900	14,21	4500	11,25
20	24,07	900	16,65	2000	14,03	5000	10,88
40	23,53	1000	16,32	2200	13,71	5500	10,55
60	23,05	1100	16,01	2400	13,42	6000	10,24
80	22,64	1200	15,73	2600	13,14	6500	9,96
100	22,28	1300	15,47	2800	12,89	7000	9,70
200	20,90	1400	15,22	3000	12,65	7500	9,46
300	19,89	1440	15,13	3200	12,43	8000	9,23
400	19,10	1500	15,00	3400	12,22	8500	9,01
500	18,45	1600	14,78	3600	12,03	9000	8,81
600	17,91	1700	14,58	3800	11,84	9500	8,62
700	17,44	1800	14,39	4000	11,66	10000	8,44

Tooth shear strenght / rpm

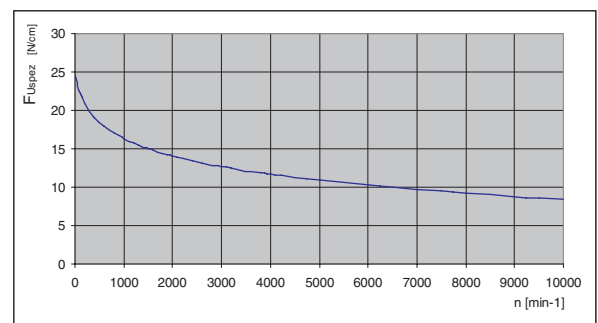

The specific load F_{Uspez} is the maximum load which one single belt tooth 1 cm wide can withstand in all operating conditions. This force is related to the drive rpm. The total load F_u transmissible by the belt in the drive is calculated by:

$$F_u [N] = F_{Uspez} \cdot Z_e \cdot b$$

F_u [N]

F_{Uspez} [N/cm]

Z_e

Z_{emax}

Z_{emax}

Z_{emax}

b [cm]

= peripheral force

= specific load

= number of teeth in mesh in the small pulley

= max. no of teeth in mesh to be considered

for the calculation of the drive

= 12 for ELATECH® M



= 6 for ELATECH® V

= belt width in cm

Specialties

PROFILE	Belt width b [mm]	ARAMID CORD	
		F _{Tzul} [N] M type	F _{Br} [N]
T5	010	840	3.360
	016	1.190	4.760
	025	1.960	7.840
	032	2.520	10.080
	050	4.060	16.240
	075	6.160	24.640
	100	8.260	33.040

Flexibility

Minimum pulley number of teeth and minimum idler diameter			
T5		TYPE OF CORD	
		STANDARD	ARAMID
Drive without reverse bending 	Timing pulley z _{min}	10	12
	Idler running on belt teeth d _{min}	30 mm	30 mm
Drive with reverse bending 	Timing pulley z _{min}	15	15
	Idler running on belt back d _{min}	30 mm	30 mm

Timing pulleys

z	da	dw	z	da	dw	z	da	dw	z	da	dw
10	15,05	15,92	39	61,25	62,09	68	107,40	108,26	97	153,55	154,42
11	16,65	17,51	40	62,85	63,66	69	109,00	109,85	98	155,15	156,02
12	18,25	19,10	41	64,40	65,27	70	110,60	111,44	99	156,75	157,61
13	19,85	20,70	42	66,00	66,86	71	112,20	113,03	100	158,35	159,20
14	21,45	22,29	43	67,70	68,46	72	113,75	114,62	101	159,95	160,79
15	23,05	23,88	44	69,20	70,05	73	115,35	116,22	102	161,55	162,38
16	24,60	25,47	45	70,80	71,64	74	116,95	117,81	103	163,10	163,97
17	26,20	27,06	46	72,40	73,23	75	118,55	119,40	104	164,70	165,57
18	27,80	28,65	47	73,95	74,82	76	120,15	120,99	105	166,30	167,16
19	29,40	30,25	48	75,55	76,42	77	121,75	122,58	106	167,90	168,75
20	31,00	31,83	49	77,15	78,01	78	123,30	124,18	107	169,50	170,34
21	32,70	33,43	50	78,75	79,60	79	124,90	125,77	108	171,10	171,94
22	34,25	35,02	51	80,35	81,19	80	126,50	127,36	109	172,65	173,53
23	35,85	36,62	52	81,95	82,78	81	128,10	128,95	110	174,25	175,12
24	37,40	38,21	53	83,50	84,38	82	129,70	130,54	111	175,85	176,71
25	39,00	39,80	54	85,10	85,97	83	131,30	132,14	112	177,45	178,30
26	40,60	41,39	55	86,70	87,54	84	132,85	133,73	113	179,05	179,84
27	42,20	42,98	56	88,30	89,15	85	134,45	135,32	114	180,65	181,49
28	43,75	44,58	57	89,90	90,74	86	136,05	136,91	115	182,23	183,08
29	45,35	46,17	58	91,50	92,34	87	137,65	138,50	116	183,82	184,67
30	46,95	47,76	59	93,05	93,93	88	139,25	140,10	117	185,42	186,26
31	48,55	49,35	60	94,65	95,52	89	140,85	141,69	118	187,01	187,86
32	50,10	50,94	61	96,25	97,11	90	142,45	143,28	119	188,61	189,45
33	51,70	52,54	62	97,85	98,70	91	144,00	144,87	120	190,21	191,04
34	53,25	54,13	63	99,45	100,30	92	145,60	146,46			
35	54,85	55,72	64	101,05	101,89	93	147,20	148,06			
36	56,45	57,31	65	102,65	103,48	94	148,80	149,65			
37	58,05	58,90	66	104,20	105,07	95	150,40	151,24			
38	59,65	60,50	67	105,80	106,66	96	152,00	152,83			

