

# Product overview

Plastic Chain Series – Standard Range

## Side Flexing Chains

Pitch 50.0 mm (1.97 in)  <b>uni 1700</b> Strength: 4000 N (899 lbf) Min radius: 150.0 mm (5.91 in)	Pitch 50.0 mm (1.97 in)  <b>uni 1701   Tab   Tab R*</b> Strength: 4000 N (899 lbf) Min radius: 150.0 mm (5.91 in) 125.0 mm (4.92 in)*	Pitch 50.0 mm (1.97 in)  <b>uni 1702</b> Strength: 4000 N (899 lbf) Min radius: 150.0 mm (5.91 in)	Pitch 50.0 mm (1.97 in)  <b>uni 1702 M</b> Strength: 4000 N (899 lbf) Min radius: 150.0 mm (5.91 in)
Pitch 50.0 mm (1.97 in)  <b>uni 1703</b> Strength: 4000 N (899 lbf) Min radius: 150.0 mm (5.91 in)	Pitch 50.0 mm (1.97 in)  <b>uni 1704</b> Strength: 4000 N (899 lbf) Min radius: 137.5 mm (5.41 in)	Pitch 50.0 mm (1.97 in)  <b>uni 1705</b> Strength: 3100 N (689 lbf) Min radius: 136.0 mm (5.35 in)	Pitch 50.0 mm (1.97 in)  <b>uni 1706</b> Strength: 3100 N (689 lbf) Min radius: 150.0 mm (5.91 in)
Pitch 50.8 mm (2.00 in)  <b>uni 3200 Tab</b> Strength: 2525 N (568 lbf) Min radius: 406.0 mm (16.00 in)	Pitch 63.5 mm (2.50 in)  <b>uni 2500</b> Strength: 7500 N (1686 lbf) Min radius: 600.0 mm (23.62 in)	Pitch 63.5 mm (2.50 in)  <b>uni 2600 C   Tab C</b> Strength: 6000 N (1686 lbf) Min radius: 600.0 mm (23.62 in)	Pitch 63.5 mm (2.50 in)  <b>uni 2600 O   Tab O</b> Strength: 6000 N (1686 lbf) Min radius: 600.0 mm (23.62 in)
Pitch 70.0 mm (2.76 in)  <b>uni 2700</b> Strength: 11000 N (2473 lbf) Min radius: 300.0 mm (11.81 in)	Pitch 82.5 mm (3.25 in)  <b>uni 1400   Tab</b> Strength: 8000 N (1798 lbf) Min radius: 450 mm (17.72 in)	Pitch 82.5 mm (3.25 in)  <b>uni 2800   Tab</b> Strength: 6000 N (1349 lbf) Min radius: 500.0 mm (19.69 in)	

## Straight Running Chains

Pitch 50.8 mm (2.00 in)  <b>uni 3200</b> Strength: 3150 N (708 lbf)	Pitch 66.3 mm (2.61 in)  <b>uni NH78</b> Strength: T1: 9000 N (2023 lbf) T3: 6000 N (1349 lbf) T5: 5000 N (1124 lbf) T2: 7000 N (1574 lbf) T4: 6000 N (1349 lbf)
---	--

## Side Flexing Chains


Pitch 19.1 mm (0.75 in)



### uni 440 Tab

Strength: 1100 N (247 lbf)  
Min radius: 175.0 mm (6.89 in)

Download uni Rubber  
Profile Overview at  
[www.unichains.com](http://www.unichains.com)

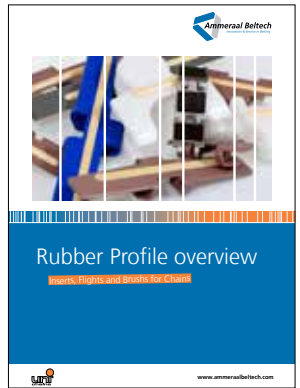

Pitch 38.1 mm (1.50 in)



### uni 879 Tab\* | Tab R

Strength: 2250 N (506 lbf)  
Min radius: 400.0 mm (15.75 in)\*  
200.0 mm (7.87 in)

Pitch 38.1 mm (1.50 in)



### uni 879 Tab Safety Finger

Strength: 2250 N (506 lbf)  
Min radius: 200.0 mm (7.87 in)

Pitch 38.1 mm (1.50 in)



### uni 879 Tab Safety

Strength: 2250 N (506 lbf)  
Min radius: 200.0 mm (7.87 in)

Pitch 38.1 mm (1.50 in)



### uni 879 Tab R G4

Strength: 2250 N (506 lbf)  
Min radius: 200.0 mm (7.87 in)

Pitch 38.1 mm (1.50 in)



### uni 880

Strength: 2250 N (506 lbf)  
Min radius: 400.0 mm (15.75 in)

Pitch 38.1 mm (1.50 in)



### uni 880 Tab\* | Tab R

Strength: 2250 N (506 lbf)  
Min radius: 400.0 mm (15.75 in)\*  
200.0 mm (7.87 in)

Pitch 38.1 mm (1.50 in)



### uni 880 Tab RT

Strength: 2250 N (506 lbf)  
Min radius: 200.0 mm (7.87 in)

Pitch 38.1 mm (1.50 in)



### uni 880 Super Flex

Strength: 2250 N (506 lbf)  
Min radius: 457.0 mm (17.99 in)  
610.0 mm (24.02 in)

Pitch 38.1 mm (1.50 in)



### uni 882 Tab

Strength: 4000 N (899 lbf)  
Min radius: 610.0 mm (24.02 in)  
700.0 mm (27.56 in)

Pitch 38.1 mm (1.50 in)



### uni 882 Tab SC

Strength: 4000 N (899 lbf)  
Min radius: 610 mm (24.02 in)

Pitch 38.1 mm (1.50 in)



### uni 882 Tab PRR

Strength: 4000 N (899 lbf)  
Min radius: 610 mm (24.02 in)

## Straight Running Chains

Pitch 38.1 mm (1.50 in)



### uni 820 | 831

Strength: 2000 N (899 lbf)

Pitch 38.1 mm (1.50 in)



### uni 821

Strength: 3000 N (674 lbf)

Pitch 38.1 mm (1.50 in)



### uni 821 PRR

Strength: 3000 N (674 lbf)

## Side Flexing Chains

<b>Pitch 12.7 mm (0.50 in)</b> 	<b>Pitch 19.1 mm (0.75 in)</b> 	<b>Pitch 19.1 mm (0.75 in)</b> 	<b>Pitch 19.1 mm (0.75 in)</b> 
<b>uni 1843</b> Strength SS: 1500 N (340 lbf) Strength carbon: 2000 N (450 lbf) Min radius: 254 mm (10.0 in)	<b>uni 1873</b> Strength SS: 2000 N (450 lbf) Strength carbon: 4000 N (900 lbf) Min radius: 356 mm (14.02 in) 457 mm (17.99 in)	<b>uni 1873 Grip G3   Grip G4   Grip G4L</b> Strength SS: 2000 N (450 lbf) Strength carbon: 4000 N (900 lbf) Min radius: 356 mm (14.02 in)	<b>uni 1873 Grip D</b> Strength SS: 2000 N (450 lbf) Strength carbon: 4000 N (900 lbf) Min radius: 356 mm (14.02 in)
<b>Pitch 19.1 mm (0.75 in)</b> 			
<b>uni 3873</b> Stainless steel: 2000 N (450 lbf) Carbon steel: 4000 N (900 lbf) Min radius: 356 mm (14.02 in)			

## Straight Running Chains

<b>Pitch 12.7 mm (0.50 in)</b> 	<b>Pitch 19.1 mm (0.75 in)</b> 	<b>Pitch 19.1 mm (0.75 in)</b> 
<b>uni 843 SK</b> Strength SS: 1500 N (340 lbf) Strength carbon: 2000 N (450 lbf)	<b>uni 863   Tab</b> Strength SS: 2700 N (600 lbf) Strength carbon: 5500 N (1200 lbf)	<b>uni 963</b> Strength SS: 2000 N (450 lbf) Strength carbon: 4000 N (900 lbf)

## Local Contacts

Authorised distributor Ammeraal Beltech:

**TYMA CZ, s.r.o.**

Na Pískách 731

400 04 Trmce

Tel: +420 475 655 010

E-mail: [info@tyma.cz](mailto:info@tyma.cz), <http://www.tyma.cz>

For further information,  
please find the latest  
version of our modular  
datasheets at:  
**[www.unichains.com](http://www.unichains.com)**



Expert advice, quality solutions  
and local service  
for all your belting needs  
**[www.ammeraalbeltech.com](http://www.ammeraalbeltech.com)**

**Global Headquarters:**  
**Ammeraal Beltech Holding B.V.**  
P.O. Box 38, 1700 AA Heerhugowaard  
The Netherlands

T +31 72 575 1212

F +31 72 571 6455

[info@ammeraalbeltech.com](mailto:info@ammeraalbeltech.com)

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.