



T-Profiles

T-Profile PU60A blue smooth (15 x 5 mm)



FDA
EC

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTF15X5LG	15 x 5	0,44	5,3	50	164	25	1,0	4,5	9,9



Recommended pretension: 4...8 %

approx. 65° Shore A


Coeff. of friction μ : Steel: approx. 0,90 | PE: approx. 0,65 | HDPE: approx. 0,60 | FDA/EC compliant (Limited suitability EC)

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU65A ultramarine blue smooth (9,5 x 3,5 mm)



approx. 72° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100 m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTG95X35LA	9,5 x 3,5	0,20	2,4	70	230	20	0,8	2,9	6,4



Recommended pretension: 4...8 %


Coeff. of friction μ : Steel: approx. 0,75 | PE: approx. 0,50 | HDPE: approx. 0,45 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU65A ultramarine blue smooth (15 x 5 mm)



approx. 72° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTG15X5LG	15 x 5	0,44	5,3	50	164	30	1,2	8,1	17,8



Recommended pretension: 4...8 %


Coeff. of friction μ : Steel: approx. 0,75 | PE: approx. 0,50 | HDPE: approx. 0,45 | FDA/EC compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU70A ultramarine blue smooth (9 x 4 mm)



approx. 76° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTH9X4GL	9 x 4	0,23	2,8	70	230	25	1,0	4,5	9,9



Recommended pretension: 4...8 %


Coeff. of friction μ : Steel: approx. 0,75 | PE: approx. 0,50 | HDPE: approx. 0,45 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU75A sky blue smooth (8 x 5 mm)



approx. 80° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBSP75A8X5HI	8 x 5	0,25	3,1	40	131	30	1,2	6,0	13,2



Recommended pretension: 4...8 %


Coeff. of friction μ : Steel: approx. 0,70 | PE: approx. 0,40 | HDPE: approx. 0,35 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU80A ultramarine blue smooth (9,5 x 3,5 mm)



approx. 84° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTJ95X35L	9,5 x 3,5	0,20	2,4	30	100	30	1,2	5,2	11,4



Recommended pretension: 4...8 %

Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU80A ultramarine blue smooth (10 x 4,5 mm)



approx. 84° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBT12X45X10L	10 x 4,5	0,27	3,3	30	100	40	1,6	8,1	17,8



Recommended pretension: 4...8 %


Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU80A ultramarine blue smooth (15 x 5 mm)



approx. 84° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTJ15X5L	15 x 5	0,40	4,8	50	164	40	1,6	9,6	21,1



Recommended pretension: 4...8 %

Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

3L T-Top PU80A orange smooth (14,3 x 7,5 mm)



approx. 84° Shore A










Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTJ142X750	14,3 x 7,5	0,72	8,7	30	100	80	3,1	17,3	38,1



Recommended pretension: 3...6 %

Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

								
Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

Crown Top PU80A orange smooth (14,3 x 6,3 mm)



FDA
EC

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTJ143X630G	14,3 x 6,3	0,58	7,0	30	100	80	3,1	13,9	30,6



Recommended pretension: 3...6 %

approx. 84° Shore A

Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols


Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.

T-Profiles

T-Profile PU80A half-round orange smooth (19,2 x 5,5 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTJ192X550G	19,2 x 5,5	0,65	7,8	30	100	40	1,6	15,6	34,3



Recommended pretension: 3...6 %

approx. 84° Shore A

Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU80A half-round orange smooth (12,7 x 5,5 mm)



approx. 84° Shore A










Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTJ127X550G	12,7 x 5,5	0,44	5,6	30	100	40	1,6	11,2	24,6



Recommended pretension: 3...6 %


Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

								
Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU85A ultramarine blue smooth (9,5 x 3,5 mm)



approx. 88° Shore A

Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100 m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTK95X35L	9,5 x 3,5	0,20	2,4	30	100	50	2,0	6,0	13,2



Recommended pretension: 3...6 %


Coeff. of friction μ : Steel: approx. 0,65 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU85A (25 x 5 mm) green or white embossed (EFI) / smooth



also available: smooth










Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTK25X5GW01 (green, embossed)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2
FBSP85A25X5 (green, smooth)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2
FBTK25X5WW01 (white, embossed)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2
FBSP85A25X5A (white, smooth)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2



approx. 88° Shore A


Recommended pretension: 3..6 %, **Coeff. of friction μ** : Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30

Symbols

								
Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.


T-Profiles

T-Profile PU85A (25 x 5 mm) green or white embossed (EFI) / smooth



also available: smooth










Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTK25X5GW01 (green, embossed)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2
FBSP85A25X5 (green, smooth)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2
FBTK25X5WW01 (white, embossed)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2
FBSP85A25X5A (white, smooth)	25 x 5	0,58	7,0	50	164	50	2,0	16,0	35,2



approx. 88° Shore A


Recommended pretension: 3..6 %, **Coeff. of friction μ** : Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30

Symbols


								
Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.

T-Profiles

T-Profile PU85A sapphire blue smooth / ribbed (LGD)* (25 x 5 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBSP85A25X5B	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4
FBTK25X5LGA (ribbed)	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4



*Longitudinal grooves (LGD)

Recommended pretension: 3...6 %

approx. 88° Shore A


Coeff. of friction μ : Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols


Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.

T-Profiles

T-Profile PU85A sapphire blue smooth / ribbed (LGD)* (25 x 5 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBSP85A25X5B	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4
FBTK25X5LGA (ribbed)	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4



*Longitudinal grooves (LGD)

Recommended pretension: 3...6 %

approx. 88° Shore A


Coeff. of friction μ : Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols




Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.

T-Profile

T-Profile PU85A sapphire blue smooth / ribbed (LGD) / Diamond (25 x 5 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100 m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBSP85A25X5B	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4
FBTK25X5LGA (ribbed)	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4
FBTK25X5LW01 (Diamond)	25 x 5	0,59	7,3	50	164	50	2,0	15,2	33,4



Recommended pretension: 3...6 %, **Coeff. of friction μ:** Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30

approx. 88° Shore A


FDA/EC/USDA compliant

Symbols


Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	FDA/EC conformity for hydrolysis-resistant conveying profiles with rough and finely textured surfaces. EC/FDA/USDA conformity for smooth profiles.		Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms

T-Profiles

T-Profile PU85A white or sapphire blue (20 x 8 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBSP85A20X8W (white)	20x8	0,83	10,0	30	100	100	4,0	21,4	47,1
FBSP85A20X8 (sapphire blue)	20x8	0,83	10,0	30	100	100	4,0	21,4	47,1



Recommended pretension: 3...6 %

approx. 88° Shore A


Coeff. of friction μ : Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols


Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.

T-Profiles

T-Profile PU85A white or sapphire blue (20 x 8 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBSP85A20X8W (white)	20x8	0,83	10,0	30	100	100	4,0	21,4	47,1
FBSP85A20X8 (sapphire blue)	20x8	0,83	10,0	30	100	100	4,0	21,4	47,1



Recommended pretension: 3...6 %

approx. 88° Shore A

Coeff. of friction μ : Steel: approx. 0,60 | PE: approx. 0,35 | HDPE: approx. 0,30 | FDA/EC/USDA compliant

Symbols


Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for micro-organisms	Belt made of 2 components enables combination of hardness and features.

Special V-belts

T-Profile PU95A beige smooth (30 x 9,5 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTM30X95B	30 x 9,5	1,23	14,8	30	100	110	4,3	45,6	100,3



Recommended pretension: 3...5 %

approx. 95° Shore A

Coeff. of friction μ : Steel: approx. 0,45 | PE: approx. 0,25 | HDPE: approx. 0,20 | FDA/EC compliant

Symbols


Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.

Special V-belts

T-Profile PU95A beige smooth (50 x 11,5 mm)



Order No.	Profile dimension mm	Cross section cm ²	approx. Weight kg/100 m	Standard Roll		Recommended Min. pulley Ø		Fmax/belt (Standard)	
				m	ft	mm	inch	kg	lbs
FBTM50X11B	50 x 11,5	2,43	29,2	30	100	130	5,1	90,1	198,2

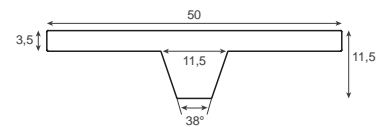

Recommended pretension: 3...5 %

approx. 95° Shore A

Coeff. of friction μ : Steel: approx. 0,45 | PE: approx. 0,25 | HDPE: approx. 0,20 | FDA/EC/USDA compliant

Symbols

Antistatic profile with outstanding mechanical properties.	Profile with exceptional low-temperature flexibility down to -30°C.	Patented material formulation „PLUS“ for lower product elongation.	Very good UV resistance.	Profiles with FDA/EC conformity for direct contact with food.	Metal and X-ray detectable profiles for maximum food safety.	Hydrolysis resistance (HY). Suitable for humid environments.	Microbe-resistant materials do not provide a breeding ground for microorganisms	Belt made of 2 components enables combination of hardness and features.