


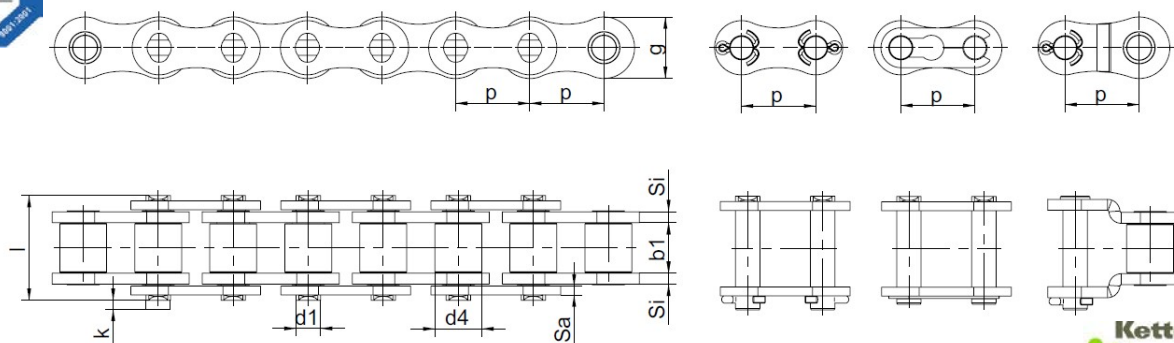

Jednořadé podle DIN 8187 / ISO 606 / Simplex according to ISO 606

HFS - High Fatigue Strength

Označení / Type ISO $p \times b1$ palce/inch (mm)	p mm	b ₁ mm	d ₄ mm	d ₁ mm	l mm	k mm	S _i mm	S _a mm	g mm	e mm	f cm ²	Síla k přetržení Breaking load N	Hmotnost Weight kg/m
08B-1 HFS 1/2" × 5/16"	12,7	7,75	8,51	4,45	17	1,6	1,5	1,5	11,8	-	0,5	18800	0,75
10B-1 HFS 5/8" × 3/8"	15,875	9,65	10,16	5,08	19,6	2,5	1,65	1,65	14,7	-	0,67	26300	0,98
12B-1 HFS 3/4" × 29/64"	19,05	11,68	12,07	5,72	22,7	3,3	1,8	1,8	16,1	-	0,89	30500	1,26
16B-1 HFS 1" × 17,02 mm	25,4	17,02	15,88	8,28	36,1	3,1	4	3,2	21	-	2,1	72500	2,83
20B-1 HFS 1 1/4" × 3/4"	31,75	19,56	19,05	10,19	43,2	4,4	4,5	3,5	26,4	-	2,96	109900	3,94
24B-1 HFS 1 1/2" × 1"	38,1	25,4	25,4	14,63	53,4	5,5	6	4,7	33,4	-	5,54	178300	7,21
28B-1 HFS 1 3/4" × 1 1/4"	44,45	30,99	27,94	15,9	65,1	4,8	7,4	6	37	-	7,39	245000	9,58
32B-1 HFS 2" × 1 1/4"	50,8	30,99	29,21	17,81	67,4	3,9	6,9	6	42,2	-	8,1	272400	9,97
40B-1 HFS 2 1/2" × 1 1/2"	63,5	38,1	39,37	22,89	81,5	7	8,5	8	52,9	-	12,75	400000	17,00
48B-1 HFS 3" × 1 3/4"	76,2	45,72	48,2	29,2	99,1	6,9	12	10	64	-	20,61	600000	27,00
56B-1 HFS 3 1/2"	88,9	53,34	54	34,3	113	12	14	12	78	-	27,9	850000	38,00
64B-1 HFS 4"	101,6	60,96	63,5	39,4	129	19	15	14	93,3	-	36,25	1120000	49,50
72B-1 HFS 4 1/2"	114,3	68,58	72,39	44,5	147	14	18	15	103,63	-	46,19	1400000	64,50