


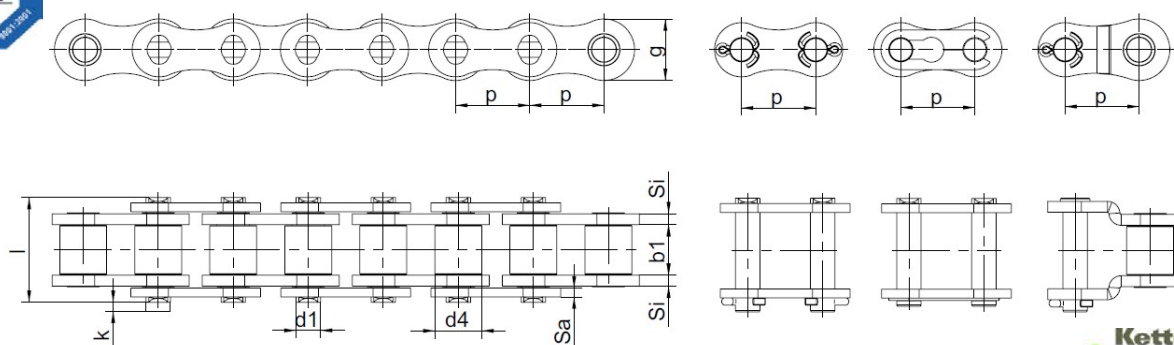

Jednořadé podle DIN 8188 / ISO 606 / Simplex according to ISO 606

HFS - High Fatigue Strength

Označení / Type	p	b ₁	d ₄	d ₁	l	k	S _i	S _a	g	e	f	Síla k přetržení	Hmotnost		
ISO	ANSI	Rozteč/pitch		Breaking load										Weight	
		inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	N	kg/m	
08A-1 HFS	40-1	1/2"	12,7	7,9	7,9	3,97	16,32	2,4	1,5	1,5	12,06	–	0,44	17200	0,62
10A-1 HFS	50-1	5/8"	15,875	9,5	10,14	5,08	20,3	2,17	2	2	15,08	–	0,7	27400	1,01
12A-1 HFS	60-1	3/4"	19,05	12,7	11,88	5,95	25,26	2,8	2,4	2,4	18,09	–	1,05	38200	1,45
16A-1 HFS	80-1	1"	25,4	15,85	15,84	7,93	32,76	3,67	3,2	3,2	24,13	–	1,78	72500	2,55
20A-1 HFS	100-1	1 1/4"	31,75	19,1	19,04	9,53	40,08	3,86	4	4	30,16	–	2,61	102900	3,95
24A-1 HFS	120-1	1 1/2"	38,1	25,4	22,2	11,11	49,92	6	4,8	4,8	36,19	–	3,92	142100	5,64
28A-1 HFS	140-1	1 3/4"	44,45	25,4	25,39	12,7	54,16	7,9	5,6	5,6	42,22	–	4,7	191100	7,38
32A-1 HFS	160-1	2"	50,8	31,55	28,58	14,29	65,6	4,3	6,4	6,4	48,26	–	6,36	260000	9,69
36A-1 HFS	180-1	2 1/4"	57,15	35,48	35,7	17,46	72,8	8	7,2	7,2	53,6	–	8,75	315000	13,30
40A-1 HFS	200-1	2 1/2"	63,5	54,94	39,68	19,84	79,5	6	8	8	60	–	10,73	420000	16,99
48A-1 HFS	240-1	3"	76,2	47,63	47,63	23,8	96,5	7,5	9,5	9,5	72,39	–	15,86	676000	25,00