
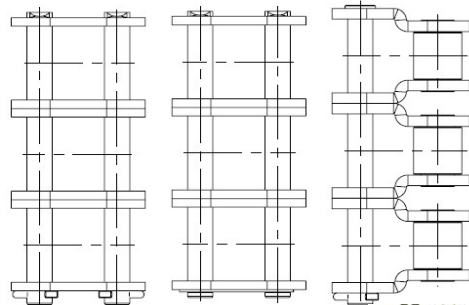
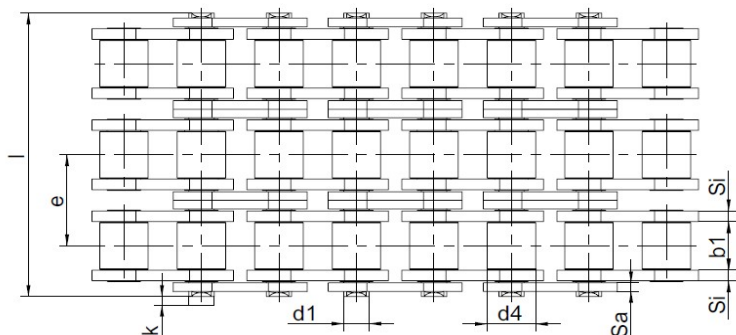





Třířadé podle DIN 8187 / ISO 606 / Triplex according to ISO 606

HFS - High Fatigue Strength

Označení / Type	p	b ₁	d ₄	d ₁	l	k	S _i	S _a	g	e	f	Síla k přetržení	Hmotnost	
ISO	p × b ₁											Breaking load	Weight	
	palce/inch (mm)	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	N	kg/m	
08B-3 HFS	1/2" × 5/16"	12,7	7,75	8,51	4,45	44,9	1,7	1,5	1,5	11,8	13,92	1,51	56400	2,15
10B-3 HFS	5/8" × 3/8"	15,875	9,65	10,16	5,08	52,8	2,5	1,65	1,65	14,7	16,59	2,02	78900	2,89
12B-3 HFS	3/4" × 29/64"	19,05	11,68	12,07	5,72	61,7	3,2	1,8	1,8	16,1	19,46	2,68	91500	3,72
16B-3 HFS	1" × 17,02 mm	25,4	17,02	15,88	8,28	99,9	3,6	4	3,2	21	31,88	6,31	217500	7,88
20B-3 HFS	1 1/4" × 3/4"	31,75	19,56	19,05	10,19	116	4,6	4,5	3,5	26,4	36,45	8,87	329700	11,66
24B-3 HFS	1 1/2" × 1"	38,1	25,4	25,4	14,63	150	5,8	6	4,7	33,4	48,36	16,63	534900	21,10
28B-3 HFS	1 3/4" × 1 1/4"	44,45	30,99	27,94	15,9	184	5,1	7,4	6	37	59,56	22,18	735000	28,34
32B-3 HFS	2" × 1 1/4"	50,8	30,99	29,21	17,81	184	4,4	6,9	6	42,2	58,55	24,31	817200	29,30
40B-3 HFS	2 1/2" × 1 1/2"	63,5	38,1	39,37	22,89	226	7	8,5	8	52,9	72,29	38,25	1200000	50,00
48B-3 HFS	3" × 1 3/4"	76,2	45,72	48,2	29,2	281	8	12	10	64	91,21	61,84	1800000	80,00
56B-3 HFS	3 1/2"	88,9	53,34	54	34,3	330	12	14	12	78	106,6	83,71	2310000	111,50
64B-3 HFS	4"	101,6	60,96	63,5	39,4	370	10	15	14	90,17	119,89	108,74	3050000	150,00
72B-3 HFS	4 1/2"	114,3	68,58	72,39	44,5	420	14	18	15	103,63	136,27	135,57	3930000	194,00