
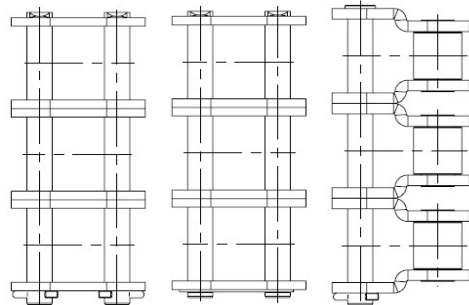
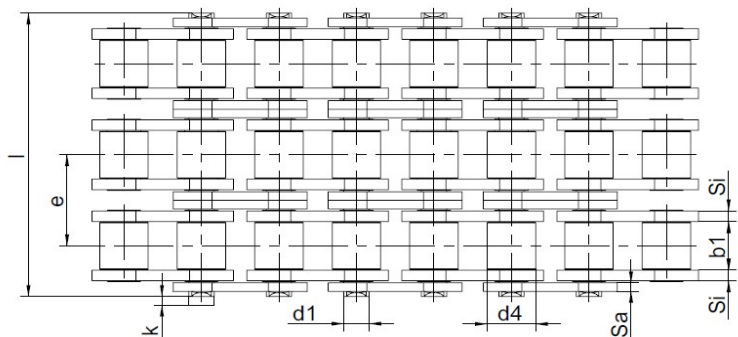





Třířadé podle DIN 8188 / ISO 606 / Triplex according to ISO 606

HFS - High Fatigue Strength

Označení / Type	p	b ₁	d ₄	d ₁	l	k	S _i	S _a	g	e	f	Síla k přetržení	Hmotnost		
ISO	ANSI	Rozteč/pitch		Breaking load										Weight	
		inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	N	kg/m	
08A-3 HFS	40-3	3/8"	12,7	7,9	7,9	3,9	46,15	2,4	1,5	1,5	12,06	14,38	1,32	48000	1,82
10A-3 HFS	50-3	1/2"	15,875	9,5	10,14	5,08	56,6	2,75	2	2	15,08	18,11	2,1	79500	2,98
12A-3 HFS	60-3	5/8"	19,05	12,7	11,88	5,95	71,5	2,7	2,4	2,4	18,09	22,78	3,15	105000	4,28
16A-3 HFS	80-3	3/4"	25,4	15,85	15,84	7,93	91,5	3,9	3,2	3,2	24,13	29,29	5,34	217500	7,50
20A-3 HFS	100-3	1"	31,75	19,1	19,04	9,53	111,8	4,3	4	4	30,16	35,76	7,83	308700	11,75
24A-3 HFS	120-3	1 1/4"	38,1	25,4	22,2	11,11	141	4,96	4,8	4,8	36,19	45,44	11,76	426300	16,73
28A-3 HFS	140-3	1 1/2"	44,45	25,4	25,39	12,7	152,56	4,3	5,6	5,6	42,22	48,87	14,1	573000	21,93
32A-3 HFS	160-3	1 3/4"	50,8	31,65	28,35	14,28	183,08	4,56	6,3	6,3	48,26	58,55	19,26	735000	27,89
36A-3 HFS	180-3	2"	57,15	35,48	35,71	17,46	204,9	5,8	7,2	7,2	53,6	65,84	26,4	945000	38,20
40A-3 HFS	200-3	2 1/2"	63,5	38,1	39,67	19,84	222	9	8	8	60	71,55	32,2	1407000	48,90
48A-3 HFS	240-3	3"	76,2	47,63	47,63	23,8	272	9	9,5	9,5	71	87,83	47,6	2028000	72,70