


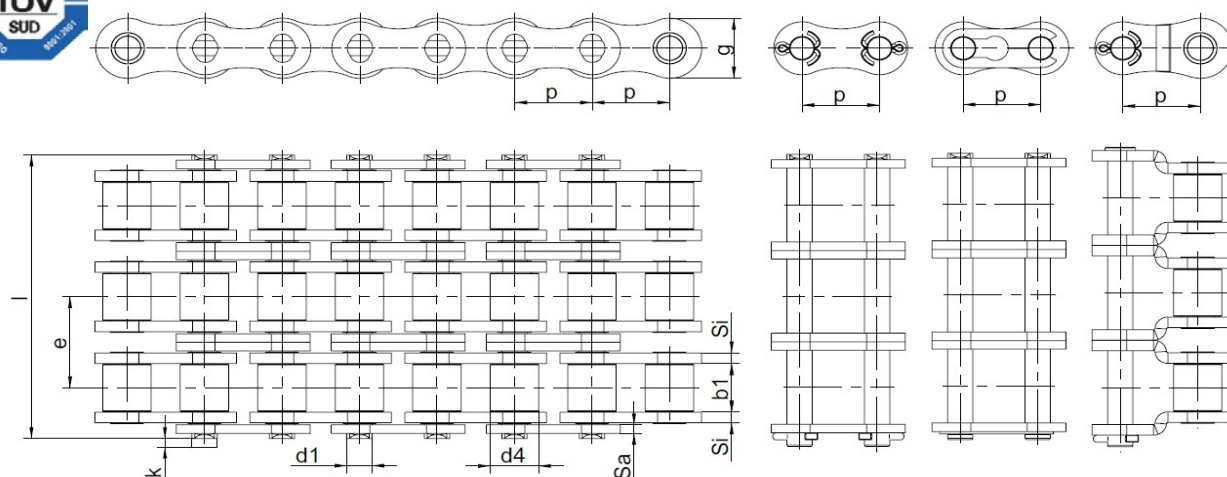

Třířadé podle DIN 8187 / ISO 606 / Triplex according to ISO 606

SS - Stainless Steel

Označení / Type	p	b ₁	d ₄	d ₁	l	k	S _i	S _a	g	e	f	Síla k přetržení	Hmotnost	
ISO	p × b1											Breaking load	Weight	
	palce/inch (mm)	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	N	kg/m	
*06B-3 SS	3/8" × 7/32"	9,525	5,72	6,35	3,28	33,5	0,9	1,3	1,3	8,2	10,24	0,84	12600	1,12
08B-3 SS	1/2" × 5/16"	12,7	7,75	8,51	4,45	45,1	1	1,6	1,6	11,8	13,92	1,51	21700	2,05
10B-3 SS	5/8" × 3/8"	15,875	9,65	10,16	5,08	52,7	1,6	1,7	1,7	14,7	16,59	2,02	26000	2,64
12B-3 SS	3/4" × 29/64"	19,05	11,68	12,07	5,72	61,5	1,6	1,85	1,85	16,1	19,46	2,68	33000	3,67
16B-3 SS	1" × 17,02 mm	25,4	17,02	15,88	8,28	99,8	1,4	4,2	3,1	21	31,88	6,31	72000	8,00
20B-3 SS	1 1/4" × 3/4"	31,75	19,58	19,05	10,19	114,2	3,5	4,5	3,5	26,3	36,45	8,87	106700	11,24
24B-3 SS	1 1/2" × 1"	38,1	25,4	25,4	14,63	150,1	4,5	6	4,8	33,25	48,36	16,63	188000	21,00
28B-3 SS	1 3/4" × 1 1/4"	44,45	30,99	27,94	15,9	184,2	4,5	7,5	6	36,8	59,56	22,18	233900	28,56
32B-3 SS	2" × 1 1/4"	50,8	30,99	29,21	17,81	182,4	5	7,5	6	42	58,55	24,31	272000	30,00

* s rovnými destičkami / with Straight Plates