

Extra-wide Polyurethane Belts

Syncro Max[®]




Elatech[®]
Technology in Motion.

Elatech

ELATECH SYNCRO-MAX®



Syncro-Max

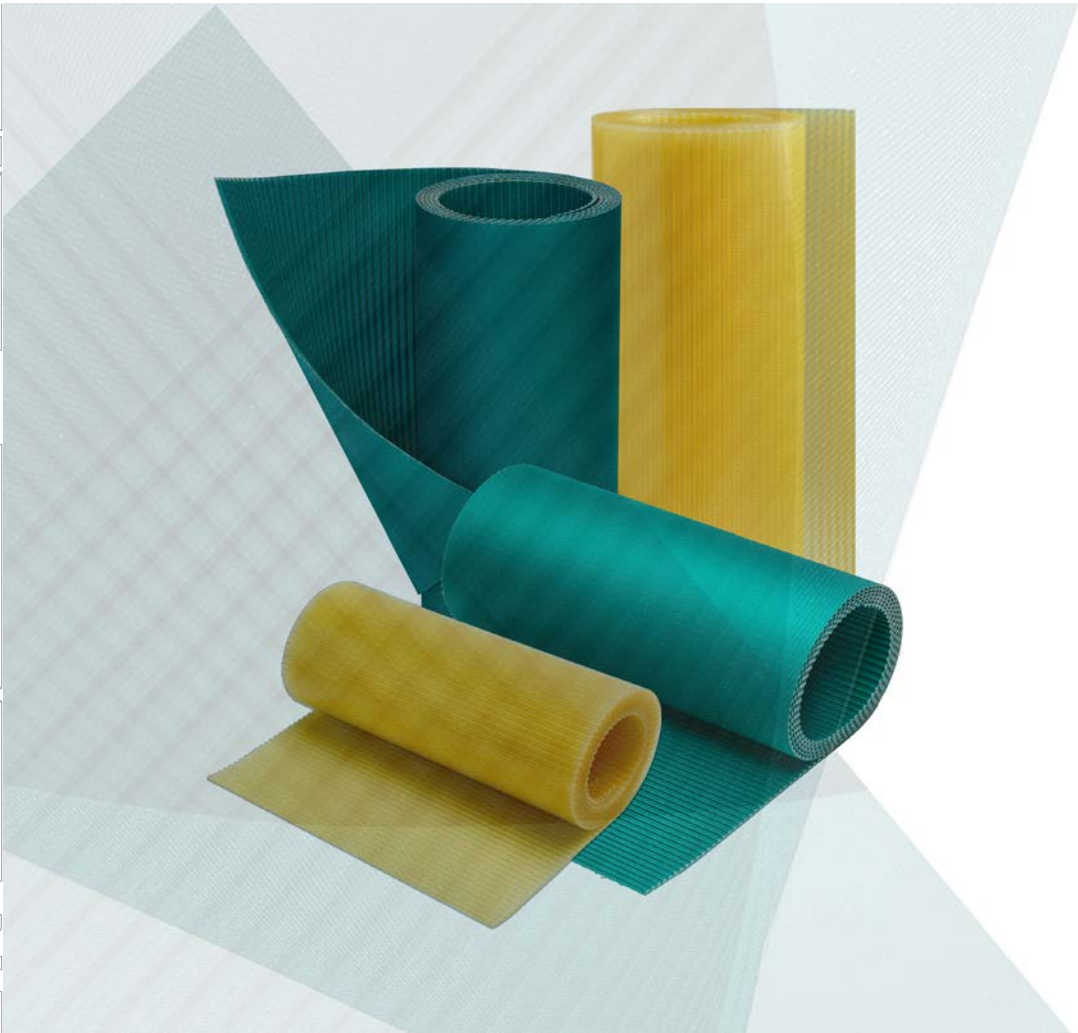


Extra-wide Polyurethane Belts

ELATECH® SYNCRO-MAX® Extra-wide Polyurethane Belts extend the advantages of synchronous timing belts to wider surfaces and to the typical applications of flat and modular conveyor belts.

Product Range

T10	Width (mm)	H	Width (in)
	250		10
	300		12
	350		14
	400		16
	450		18
	500 - 510		20

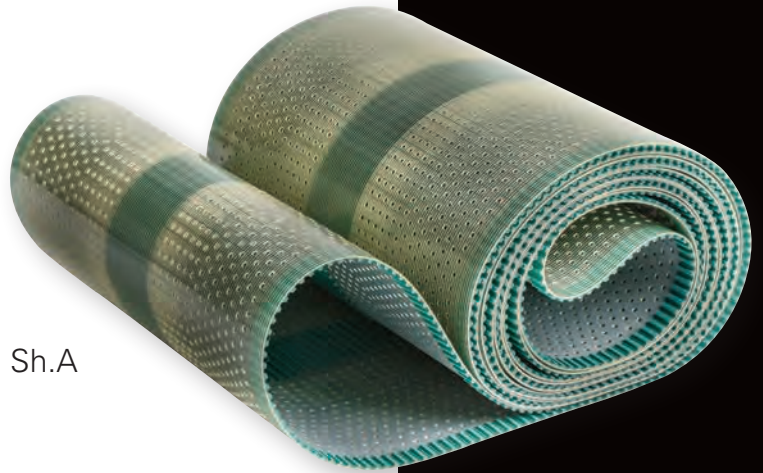

Product overview


- Natural colour PU compound material 92 Sh.A
- High durability
- Cut resistant
- Grease, chemicals and water resistant
- Non-marking
- Kevlar (Aramid) parallel cords reinforcement
- No cords exposure on belt edges
- Even cord tension
- Available in open end and welded execution
- Standard roll length 50 m

Advantages

- Synchronous conveying = no slippage, better tracking, higher indexing precision
- Smaller drive pulley requirements, lower belt tension and lower shaft loads = power saving

Typical application

- Conveying, packaging, production of baby diapers feminine hygiene items, tires production.

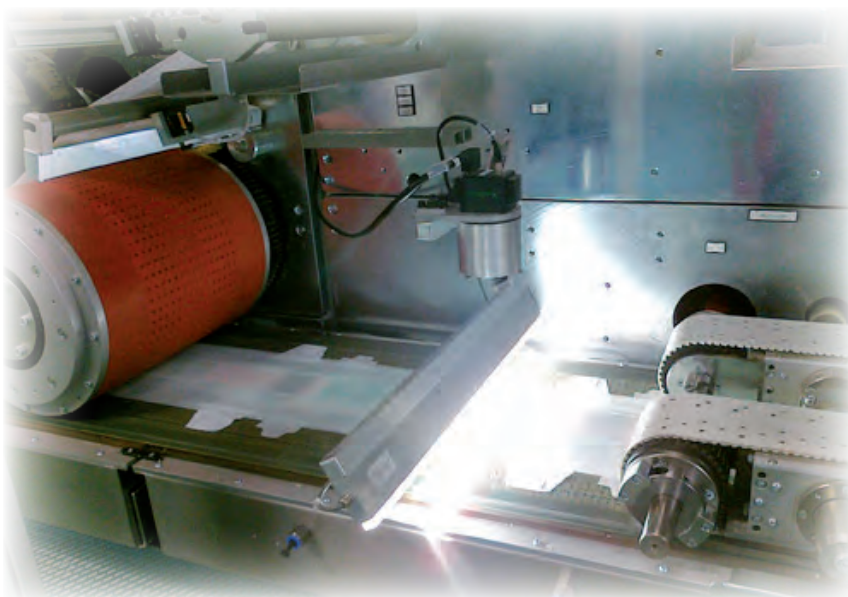

elatech.n.gom

Distributor:



TYMA CZ, s.r.o.

Na Pískách 731, 400 04 Trmice, CZ

tel.: +420 475 655 010

e-mail: info@tyma.cz

web: <https://www.tyma.cz>

Elatech S.r.l.

Via Fonte Solforosa, 1 24012 — Val Brembilla (BG) Italy