

Figur 6F




Typ S8M - Pro řemeny STD S8M - rozteč 8,0mm / For belts STD S8M - Pitch 8,0mm

Zubů Teeth	Šír.ř. Width	Označení / Obj.č. Part.No.	Typ Fig.	* Mat.	Dp [mm]	De [mm]	Df [mm]	Dm [mm]	Di [mm]	F [mm]	S [mm]	d [mm]	m [kg]
**18	20	18-S08M-20	6F	ST	45,84	44,47	32,00	28,00	-	28,0	38,0	-	0,44
	30	18-S08M-30	6F	ST	45,84	44,47	32,00	28,00	-	28,0	38,0	-	0,56
	50	18-S08M-50	6F	ST	45,84	44,47	32,00	28,00	-	28,0	38,0	-	0,81
	85	18-S08M-85	6F	ST	45,84	44,47	32,00	28,00	-	28,0	38,0	-	1,26
**20	20	20-S08M-20	6F	ST	50,93	49,56	36,00	45,00	-	28,0	38,0	-	0,52
	30	20-S08M-30	6F	ST	50,93	49,56	36,00	45,00	-	28,0	38,0	-	0,65
	50	20-S08M-50	6F	ST	50,93	49,56	36,00	45,00	-	28,0	38,0	-	0,95
	85	20-S08M-85	6F	ST	50,93	49,56	36,00	45,00	-	28,0	38,0	-	1,47
22	20	22-S08M-20	6F	ST	56,02	54,65	60,00	43,00	-	28,0	38,0	-	0,54
	30	22-S08M-30	6F	ST	56,02	54,65	60,00	43,00	-	38,0	48,0	-	0,69
	50	22-S08M-50	6F	ST	56,02	54,65	60,00	43,00	-	60,0	70,0	-	1,00
	85	22-S08M-85	6F	ST	56,02	54,65	60,00	43,00	-	95,0	105,0	-	1,55
24	20	24-S08M-20	6F	ST	61,12	59,75	66,00	45,00	-	28,0	38,0	-	0,65
	30	24-S08M-30	6F	ST	61,12	59,75	66,00	45,00	-	38,0	48,0	-	0,84
	50	24-S08M-50	6F	ST	61,12	59,75	66,00	45,00	-	60,0	70,0	-	1,23
	85	24-S08M-85	6F	ST	61,12	59,75	66,00	45,00	-	95,0	105,0	-	1,90
26	20	26-S08M-20	6F	ST	66,21	64,84	71,00	50,00	-	28,0	38,0	-	0,80
	30	26-S08M-30	6F	ST	66,21	64,84	71,00	50,00	-	38,0	48,0	-	1,00
	50	26-S08M-50	6F	ST	66,21	64,84	71,00	50,00	-	60,0	70,0	-	1,50
	85	26-S08M-85	6F	ST	66,21	64,84	71,00	50,00	-	95,0	105,0	-	2,25
28	20	28-S08M-20	6F	ST	71,30	70,08	75,00	50,00	-	28,0	38,0	-	0,87
	30	28-S08M-30	6F	ST	71,30	70,08	75,00	50,00	-	38,0	48,0	-	1,12
	50	28-S08M-50	6F	ST	71,30	70,08	75,00	50,00	-	60,0	70,0	-	1,67
	85	28-S08M-85	6F	ST	71,30	70,08	75,00	50,00	-	95,0	105,0	-	2,55
30	20	30-S08M-20	6F	ST	76,39	75,13	83,00	55,00	-	28,0	38,0	-	1,02
	30	30-S08M-30	6F	ST	76,39	75,13	83,00	55,00	-	38,0	48,0	-	1,32
	50	30-S08M-50	6F	ST	76,39	75,13	83,00	55,00	-	60,0	70,0	-	1,97
	85	30-S08M-85	6F	ST	76,39	75,13	83,00	55,00	-	95,0	105,0	-	3,00
32	20	32-S08M-20	6F	ST	81,49	80,16	87,00	60,00	-	28,0	38,0	-	1,20
	30	32-S08M-30	6F	ST	81,49	80,16	87,00	60,00	-	38,0	48,0	-	1,53
	50	32-S08M-50	6F	ST	81,49	80,16	87,00	60,00	-	60,0	70,0	-	2,29
	85	32-S08M-85	6F	ST	81,49	80,16	87,00	60,00	-	95,0	105,0	-	3,57
34	20	34-S08M-20	6F	ST	86,58	85,22	91,00	70,00	-	28,0	38,0	-	1,40
	30	34-S08M-30	6F	ST	86,58	85,22	91,00	70,00	-	38,0	48,0	-	1,80
	50	34-S08M-50	6F	ST	86,58	85,22	91,00	70,00	-	60,0	70,0	-	2,69
	85	34-S08M-85	6F	ST	86,58	85,22	91,00	70,00	-	95,0	105,0	-	4,00
36	20	36-S08M-20	6F	ST	91,67	90,30	98,50	70,00	-	28,0	38,0	-	1,55
	30	36-S08M-30	6F	ST	91,67	90,30	98,50	70,00	-	38,0	48,0	-	1,99
	50	36-S08M-50	6F	ST	91,67	90,30	98,50	70,00	-	60,0	70,0	-	2,97
	85	36-S08M-85	6F	ST	91,67	90,30	98,50	70,00	-	95,0	105,0	-	4,50
38	20	38-S08M-20	6F	ST	96,77	95,39	103,00	75,00	-	28,0	38,0	-	1,65
	30	38-S08M-30	6F	ST	96,77	95,39	103,00	75,00	-	38,0	48,0	-	2,27
	50	38-S08M-50	6F	ST	96,77	95,39	103,00	75,00	-	60,0	70,0	-	3,23
	85	38-S08M-85	6F	ST	96,77	95,39	103,00	75,00	-	95,0	105,0	-	4,90
40	20	40-S08M-20	6F	ST	101,86	100,49	106,00	75,00	-	28,0	38,0	-	1,74
	30	40-S08M-30	6F	ST	101,86	100,49	106,00	75,00	-	38,0	48,0	-	2,40
	50	40-S08M-50	6F	ST	101,86	100,49	106,00	75,00	-	60,0	70,0	-	3,50
	85	40-S08M-85	6F	ST	101,86	100,49	106,00	75,00	-	95,0	105,0	-	5,20

* Materiál: ST = ocel, GG = litina / ST = steel, GG = iron cast

** z < z min = 22 - nestandardní, není běžně skladem / Non standard, Non stock

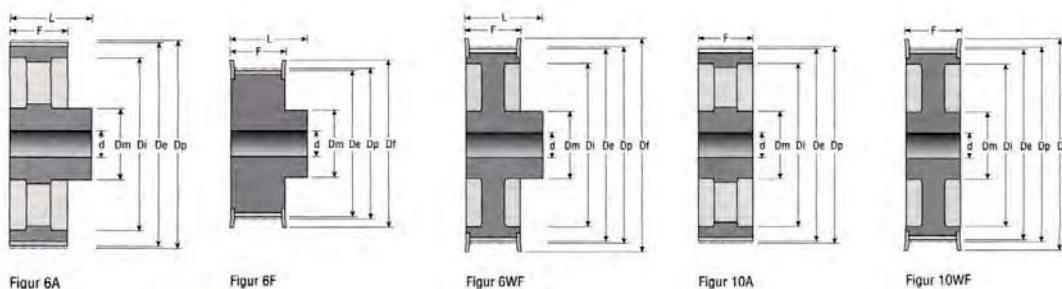

Typ S8M - Pro řemeny STD S8M - rozteč 8,0mm / For belts STD S8M - Pitch 8,0mm

Zubů Teeth	Šír.ř. Width	Označení / Obj.č. Part.No.	Typ Fig.	* Mat.	Dp [mm]	De [mm]	Df [mm]	Dm [mm]	Di [mm]	F [mm]	S [mm]	d [mm]	m [kg]
44	20	44-S08M-20	6F	GG	112,05	110,67	119,00	75,00	-	28,0	38,0	-	2,10
	30	44-S08M-30	6F	GG	112,05	110,67	119,00	75,00	-	38,0	48,0	-	2,80
	50	44-S08M-50	6F	GG	112,05	110,67	119,00	75,00	-	60,0	70,0	-	3,90
	85	44-S08M-85	6F	GG	112,05	110,67	119,00	75,00	-	95,0	105,0	-	6,60
48	20	48-S08M-20	6F	GG	122,23	120,86	127,00	75,00	-	28,0	38,0	-	2,44
	30	48-S08M-30	6F	GG	122,23	120,86	127,00	75,00	-	38,0	48,0	-	3,20
	50	48-S08M-50	6F	GG	122,23	120,86	127,00	80,00	-	60,0	70,0	-	4,30
	85	48-S08M-85	6F	GG	122,23	120,86	127,00	80,00	-	95,0	105,0	-	7,60
56	20	56-S08M-20	6WF	GG	142,60	141,23	148,00	80,00	117,00	28,0	38,0	-	2,60
	30	56-S08M-30	6WF	GG	142,60	141,23	148,00	90,00	117,00	38,0	48,0	-	3,60
	50	56-S08M-50	10WF	GG	142,60	141,23	148,00	90,00	117,00	60,0	60,0	-	5,00
	85	56-S08M-85	6F	GG	142,60	141,23	148,00	80,00	-	95,0	105,0	-	9,80
60	20	60-S08M-20	6WF	GG	152,79	151,42	158,00	80,00	127,00	28,0	38,0	-	2,80
	30	60-S08M-30	6WF	GG	152,79	151,42	158,00	90,00	127,00	38,0	48,0	-	4,00
	50	60-S08M-50	10WF	GG	152,79	151,42	158,00	100,00	127,00	60,0	60,0	-	5,30
	85	60-S08M-85	6F	GG	152,79	151,42	158,00	132,00	-	95,0	105,0	-	10,20
64	20	64-S08M-20	6WF	GG	162,97	161,60	168,00	80,00	137,00	28,0	38,0	-	2,90
	30	64-S08M-30	6WF	GG	162,97	161,60	168,00	90,00	137,00	38,0	48,0	-	4,30
	50	64-S08M-50	10WF	GG	162,97	161,60	168,00	100,00	137,00	60,0	60,0	-	5,60
	85	64-S08M-85	10WF	GG	162,97	161,60	168,00	100,00	137,00	95,0	95,0	-	10,40
72	20	72-S08M-20	6WF	GG	183,35	181,97	192,00	80,00	158,00	28,0	38,0	-	3,10
	30	72-S08M-30	6WF	GG	183,35	181,97	192,00	95,00	158,00	38,0	48,0	-	4,80
	50	72-S08M-50	10WF	GG	183,35	181,97	192,00	100,00	158,00	60,0	60,0	-	6,80
	85	72-S08M-85	10WF	GG	183,35	181,97	192,00	110,00	158,00	95,0	95,0	-	11,40
80	20	80-S08M-20	6A	GG	203,72	202,35	-	90,00	180,00	28,0	38,0	-	3,80
	30	80-S08M-30	6A	GG	203,72	202,35	-	100,00	180,00	38,0	48,0	-	5,10
	50	80-S08M-50	10WF	GG	203,72	202,35	-	110,00	180,00	60,0	60,0	-	6,90
	85	80-S08M-85	10W	GG	203,72	202,35	-	110,00	180,00	95,0	95,0	-	11,10
84	20	84-S08M-20	6A	GG	213,90	212,53	-	90,00	190,00	28,0	38,0	-	4,00
	30	84-S08M-30	6A	GG	213,90	212,53	-	100,00	190,00	38,0	48,0	-	5,50
	50	84-S08M-50	10A	GG	213,90	212,53	-	110,00	190,00	60,0	60,0	-	7,70
	85	84-S08M-85	10W	GG	213,90	212,53	-	110,00	190,00	95,0	95,0	-	12,20
90	20	90-S08M-20	6A	GG	229,18	227,81	-	90,00	204,00	28,0	38,0	-	4,20
	30	90-S08M-30	6A	GG	229,18	227,81	-	100,00	204,00	38,0	48,0	-	5,70
	50	90-S08M-50	10A	GG	229,18	227,81	-	110,00	204,00	60,0	60,0	-	8,60
	85	90-S08M-85	10A	GG	229,18	227,81	-	110,00	204,00	95,0	95,0	-	13,20
112	20	112-S08M-20	6A	GG	285,21	283,83	-	90,00	260,00	28,0	38,0	19,0	5,20
	30	112-S08M-30	6A	GG	285,21	283,83	-	100,00	260,00	38,0	48,0	19,0	6,80
	50	112-S08M-50	10A	GG	285,21	283,83	-	110,00	260,00	60,0	60,0	19,0	9,60
	85	112-S08M-85	10A	GG	285,21	283,83	-	110,00	260,00	95,0	95,0	19,0	16,30
144	20	144-S08M-20	6A	GG	366,69	365,32	-	90,00	341,00	28,0	38,0	19,0	7,50
	30	144-S08M-30	6A	GG	366,69	365,32	-	100,00	341,00	38,0	48,0	19,0	9,30
	50	144-S08M-50	10A	GG	366,69	365,32	-	110,00	341,00	60,0	60,0	19,0	13,80
	85	144-S08M-85	10A	GG	366,69	365,32	-	120,00	341,00	95,0	95,0	19,0	21,50
168	20	168-S08M-20	6A	GG	427,81	426,44	-	100,00	402,00	28,0	38,0	19,0	10,00
	30	168-S08M-30	6A	GG	427,81	426,44	-	100,00	402,00	38,0	48,0	19,0	11,40
	50	168-S08M-50	10A	GG	427,81	426,44	-	120,00	402,00	60,0	60,0	19,0	16,00
	85	168-S08M-85	10A	GG	427,81	426,44	-	120,00	402,00	95,0	95,0	19,0	26,10
192	20	192-S08M-20	6A	GG	488,92	487,55	-	100,00	463,00	28,0	38,0	19,0	14,40
	30	192-S08M-30	6A	GG	488,92	487,55	-	100,00	463,00	38,0	48,0	19,0	16,00
	50	192-S08M-50	10A	GG	488,92	487,55	-	130,00	463,00	60,0	60,0	19,0	22,40
	85	192-S08M-85	10A	GG	488,92	487,55	-	130,00	463,00	95,0	95,0	19,0	30,60