


KB - Válečkové řetězy s dutými čepy

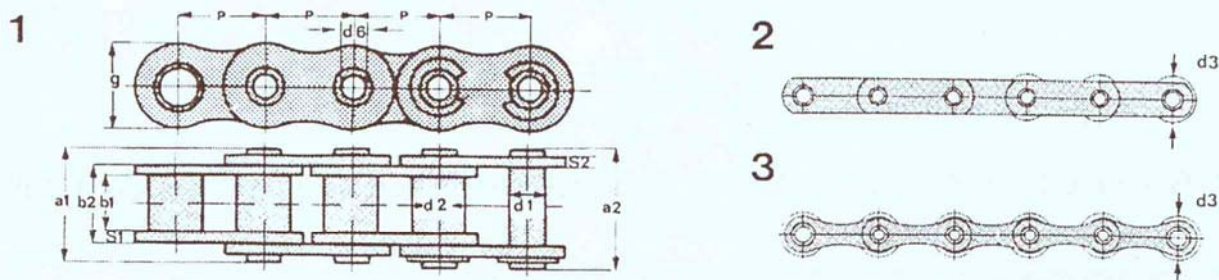

Ketten - Nr.	Teilung p	lichte Weite b ₁ min.	Innen- gliedbreite b ₂ max.	Hohlbolzen innen - ϕ d ₆	Rollen - ϕ d ₂ / d ₃ max.	Bolzen- länge a ₁ max.	V - Bolzen a ₂ max.	Laschen- höhe g max.	Art	Bruch- kraft F _B N min.	Gewicht q kg / m
08 B-HP	12,700	7,75	11,30	4,0	8,51	17,0	20,9	11,81	1	14000	0,68
10 B-HP	15,875	9,65	13,28	5,0	10,16	19,6	23,7	14,73	1	20000	0,87
12 B-HP	19,050	11,68	15,62	5,0	12,07	22,7	27,3	16,13	1	24000	1,10
2050 HP	31,75	9,53	13,84	5,12	10,16	20,3	22	15,09	2	19600	0,70
2052 HP	31,75	9,53	13,84	5,12	19,05	20,3	22	15,09	2	19600	1,29
2060 HP	38,10	12,70	17,75	5,99	11,91	25,2	27	18,08	2	26500	1,40
2062 HP	38,10	12,70	17,75	5,99	22,23	25,2	27	18,08	2	26500	2,03
50 HB	50	10	16,8	8,2	30	26,6	30	25,4	3	45000	2,25
50,8 HB	50,8	10	16,8	8,2	30	26,6	30	25,4	3	45000	2,20
63 HB	63	10	16,8	8,2	30	26,6	30	25,4	3	45000	2,00
100 HB	100	10	16,8	8,2	30	26,6	30	25,4	3	45000	1,50

Lze vyrobit i další typy řetězů s dutými čepy. Prosím zašlete nám poptávku s rozměry.